



OFF ROAD APPLICATIONS

# ***THE MICHELIN® XML™ TIRE***

All-terrain, all-position radial optimized for soft-soil/mud mobility in off road applications.



[www.michelintruck.com](http://www.michelintruck.com)



**MICHELIN**

# THE MICHELIN® XML® TIRE

All-terrain, all-position radial optimized for soft- soil/mud mobility in off road applications.


**All-terrain non-directional tread design** delivers exceptional soft soil mobility, through enhanced self-cleaning capabilities.

**Offset shoulder** designed for increased traction in soft soil.

**Full-width belt protection and elastic protector ply** helps protect the casing from bruising and penetrations.

**Tubeless construction** – compatible with Central Tire Inflation systems and bead locks.

**Radial casing design** optimized to operate at lower pressures to offer exceptional mobility and enhanced enveloping capabilities to resist impacts.

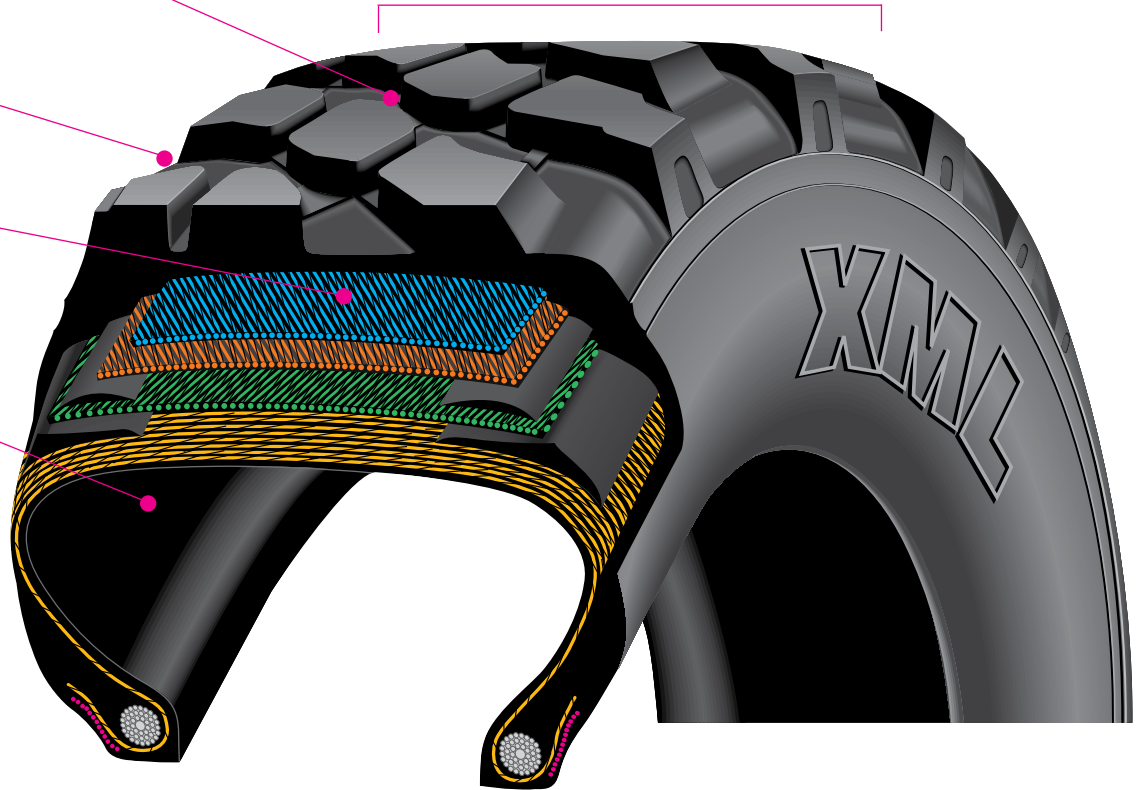

Line Haul	Regional	Urban	On/Off Road
Recommended		Acceptable	

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Revs Per Mile	Max. Load and Pressure Single			
			32nds	mph	in.	mm	in.	mm	in.	mm			lbs.	psi	kg.	kPa
12.00R20	G	63997	25	62	20.7	526	44.5	1130	12.2	310	8.50, 8.00	466	7160	105	3250	720
325/85R16	D	37984	21	62	17.7	450	38.7	984	12.9	327	9.00	540	5070	70	2300	480
395/85R20	G	99131	30	55	21.3	541	46.7	1187	15.4	390	10.0W, 10.00, 10.00V	448	10200	100	4625	690

Note: Wheel listed first is the measuring wheel.

(\*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

[www.michelintruck.com](http://www.michelintruck.com)

**United States**  
**Michelin North America, Inc.**  
 One Parkway South  
 Greenville, SC 29615  
 1-888-622-2306

**Canada**  
**Michelin North America (Canada), Inc.**  
 2500 Daniel Johnson, Suite 500  
 Laval, Quebec H7T 2P6  
 1-888-871-4444

**Mexico**  
**Industrias Michelin, S.A. de C.V.**  
 Av. 5 de febrero No. 2113-A  
 Fracc. Industrial Benito Juarez  
 7 6120, Querétaro, Qro. Mexico  
 011 52 442 296 1600